



# 1 GHz CWDM Forward Path Transmitters

C-COR® CHP Max5000

Converged Headend Platform

- ITU G.695 compliant for CWDM spacing
- 1 GHz technology
- Improves existing fiber utilization
- Revolutionary variable optical output
- Dual high isolation input
- Low profile footprint allows 200 transmitters in a standard rack
- Universal local or remote management through Craft interface and SNMP with HMS



The ARRIS C-COR CHP Max5000 Advanced 1 GHz CWDM Transmitter is ideal for MSOs that need to support growing residential and business services on a fiber-scarce HFC plant. The ITU G.695 standards-based CWDM transmitter is available at a wavelength of  $1311 \pm 4$  nm with variable output power levels of 4, 6, 8, 10, or 12 dBm and with fixed output levels of 13, 14, and 15 dBm. This transmitter is also available at a wavelength of  $1291 \pm 4$  nm with a variable output with a maximum power of 8 dBm. By deploying 1311 nm CWDM transmitters, the adjacent ITU channel at 1291 nm can be used in CWDM applications to increase the existing capacity of the HFC networks.

CHP Max5000 1 GHz CWDM transmitters enable customers to support rapidly growing residential and business services while leveraging existing network infrastructure and provides the capability to multiplex two forward wavelengths on a single fiber. In many cases, multiple return wavelengths can also be carried on the same fiber.

CHP Max5000 1 GHz CWDM transmitter's variable optical output power range enables operators to reduce spare inventory up to 60 percent, reduce the need for optical attenuators, and adjusted for unexpected link loss during system implementation. These benefits translate into significant CapEx and OpEx savings, and provide maximum flexibility for deploying advanced interactive services. The 1 GHz Transmitter's dual-input capability provides isolation that is much superior to alternative offerings, enabling simultaneous advanced service deployment of video and telephony. In addition, integral high isolation eliminates having to add external devices to achieve similar performance, thereby lowering CapEx even further and reducing system complexity.

CHP Max5000 1 GHz transmitters are dual-input, hot-swappable transmitters with integrated management through the local Craft GUI and remote management via SNMP HMS-compliant interface for external connection to an element manager.

## Features

Leverages existing network infrastructure and provides the capability to multiplex two forward wavelengths on a single fiber  
ITU G.695 standards compliant

Variable optical output power range for spare inventory reduction and flexibility to adjust for unexpected link loss during system implementation

Superior performance to facilitate 256-QAM digital channel transmission capability

Plug-in equalizer and attenuators for RF gain control and front panel RF testpoint for convenient monitoring

Downloadable firmware upgrades

## Applications

The following diagram depicts the typical application for combining two CWDM wavelengths in the forward paths that are multiplexed onto a single fiber with a maximum launch power of 7 dBm per wavelength (two wavelengths). The first CWDM wavelength that should be deployed is 1311 nm. This facilitates immediate forward path segmentation and reduces the customers served by a node in half. Follow the implementation requirements listed in the table below to ensure a successful implementation. Contact ARRIS for implementation details and solutions for other applications.

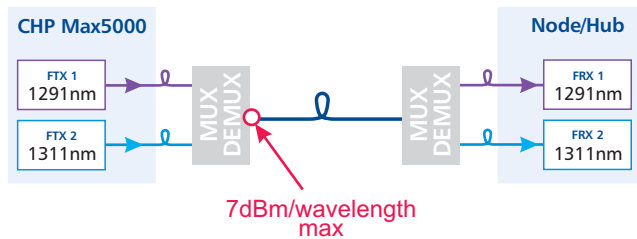


Diagram 1. 1291 and 1311 nm CWDM forward path implementation

## Implementation Requirements for Two Wavelength Applications

Implementation Requirements	Two Wavelength Application
<b>Unique Requirements</b>	
Recommended wavelengths (Note 1)	1291 and 1311 nm
Maximum launch power/wavelength	7 dBm
<b>Common Requirements</b>	
Analog broadcast content	Must use identical analog content
Digital broadcast content	Can use different, digitally modulated narrowcast content
Analog RF input level	13 to 15 dBmV/channel
Digital RF input level	7 to 9 dBmV/channel
Maximum RF input cable length difference to TXs	100 feet

### Notes

1. C-COR recommends to deploy 1311 nm as the first wavelength.
2. An optical attenuator may be required for the CHP-GFXV-1291-08-S transmitters.

## Specifications

### Optical

Optical Wavelength	1291, 1311 nm $\pm$ 4 nm
Optical Output Power	See CNR vs. Link Budget Tables

### RF

Bandwidth	
Operational Range	54 to 1002 MHz
Analog Channel Range	54 to 550 MHz
Digital Channel Range	550 to 1002 MHz
Response Flatness, P-V, typ./max.	1.0/2.0 dB
Input Return Loss	16 dB
Port-to-Port Isolation	$\geq$ 60 dB, 54 to 870 MHz $\geq$ 50 dB, 870 to 1002 MHz
Port-to-Port Gain Variation, typ./max.	$\pm$ 0.5 dB/ $\pm$ 1.0 dB

### Powering

Power Consumption, max.	17.4 W
-------------------------	--------

### Performance

Channel Plan	79 NTSC channels and up to 75 256-QAM channels
Input RF Power	
Analog Channels (Notes 1 and 2)	15 dBmV/ch
Digital QAM Channels	9 dBmV/ch
Composite Second Order, typ. (Notes 1 and 3)	-63 dBc
Composite Triple Beat, typ. (Note 1)	-70 dBc

### Mechanical

Optical Connector	SC/APC
RF Connector	F-type
RF Input Testpoint (Note 4)	-20 $\pm$ 1.0 dB
Dimensions (W x H x D) (Note 5)	1.25 x 3.4 x 18.5 in. (3.2 x 8.7 x 47.0 cm)
Weight	2.75 lbs (1.24 kg)

### Environmental

Operational Temperature (Note 6)	32 to 122°F (0 to 50°C)
Storage Temperature	-40 to 158°F (-40 to 70°C)
Humidity, noncondensing, max.	85%

#### Notes:

- Distortions are measured using only CW analog carriers per SCTE recommendation by standard RF test methods. Performance shown represents typical performance for  $\geq$ 85% of production units tested over typical Corning SMF-28 fiber (or equivalent). For minimum CSO and CTB, subtract 2 dB from typical. CSO performance is for the transmitter only. CSO specifications for 1291 nm transmitter is obtained with 15 km fiber. Typical system CSO is -60 dBc, assuming 7 dBm launch power per wavelength into fiber for a 1291 and 1311 nm system.
- OMI is 3.9% at 79 NTSC channel loading.
- CSO performance for NTSC channels is for the in-band (high-side) beats.
- Relative to main port with 0 dB pad and 0 dB EQ.
- Includes handles and connectors.
- Temperature measured at transmitter module's air inlet.

Specifications subject to change without notice

