

# CFTV

3:1  
SHRINK RATIO



INSULATE  
SEAL  
PROTECT

## HEAT SHRINK CABLE SLEEVES


Heat shrink tubing and adhesive liner combination that established the CATV industry standard for splice and connector protection

### FEATURES AND BENEFITS

- Shrink ratio: 3:1
- Craft friendly installation
- Exceptional split resistance
- CFTV adhesive retains bond providing long term protection
- Selective strippability to meet CATV industry specifications
- Minimal heat required to produce error free installation without splitting
- Thermochromatic lines change color to signal waterproof seal
- Shrinks and seals in half the time of alternative products
- Continuous operating temperature: -55°C to 110°C


### TYPICAL APPLICATIONS

- Strain relief of coaxial connectors
- Waterproof protection of CATV connectors

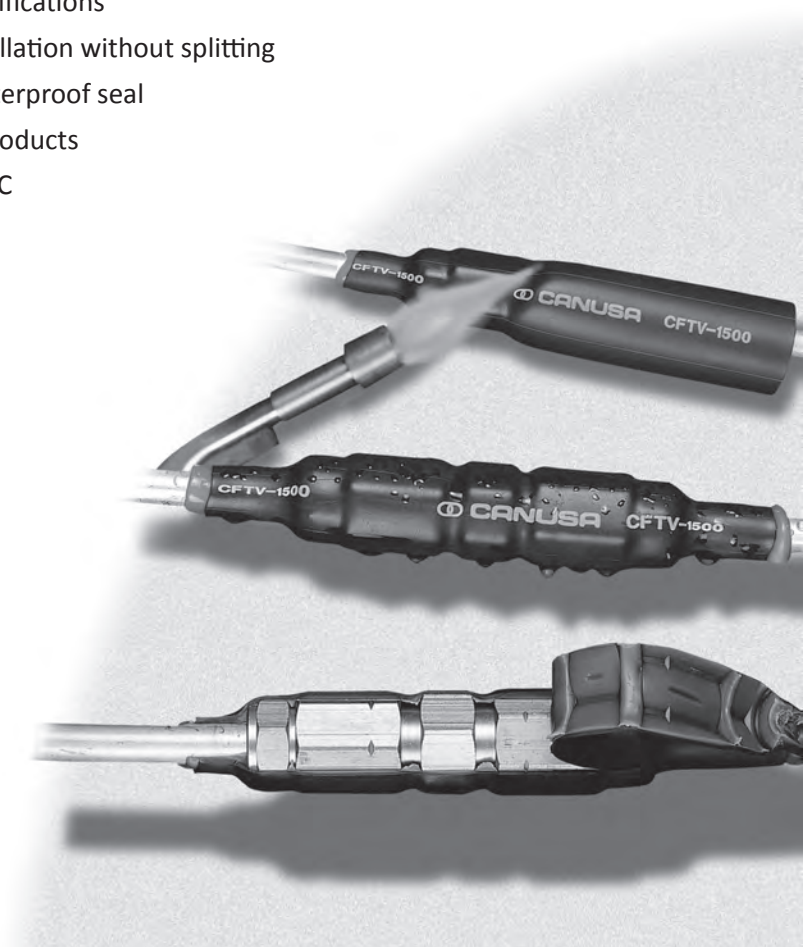

## DIMENSIONS

ORDER NUMBER	EXPANDED		RECOVERED				APPLICATION RANGE FOR GENERAL USE		LENGTHS	
	INTERNAL DIAMETER (MIN.) D		INTERNAL DIAMETER (MAX.) d		WALL THICKNESS (NOM.) W					
	MM	IN	MM	IN	MM	IN	MM	IN	M	IN
0400	10.2	0.40	3.8	0.15	2	0.08	4.5 - 8.5	.18 - .34	1.2	48
0750	19.0	0.75	5.6	0.22	2	0.08	6.0 - 16.5	.24 - .65	1.2	48
1100	27.9	1.10	10.2	0.40	2	0.08	11.5 - 25.0	.45 - 1.0	1.2	48
1300	33.0	1.30	10.2	0.40	2	0.08	11.5 - 30.0	.45 - 1.2	1.2	48
1500	38.1	1.50	12.7	0.50	2	0.08	14.0 - 35.0	.55 - 1.4	1.2	48
1700	43.2	1.70	12.7	0.50	2	0.08	14.0 - 40.0	.55 - 1.6	1.2	48
2050	52.1	2.05	19.0	0.75	2	0.08	21.0 - 45.0	.82 - 1.8	1.2	48
2750	69.8	2.75	25.4	1.00	2	0.08	30.0 - 63.0	1.2 - 2.5	1.2	48

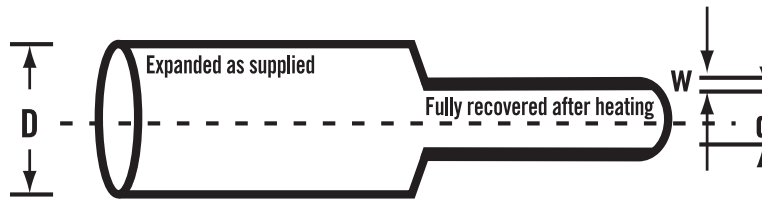

## ORDERING

- Select a dimension which will shrink snugly over the component to be covered. If recovery is restricted the resulting wall thickness will be less than specified.
- Order Example: CFTV, 1700

Please contact your Customer Service Representative for information on custom sizes, lengths and material data sheet.